

Bobcat® 763 Skid-Steer Loader

SPECIFICATIONS

Performance 763

Rated Operating Capacity ¹	1500 lb. (680 kg)
ROC with optional counterweight	1600 lb. (726 kg)
Tipping Load	3000 lb. (1361 kg)
Hydraulic Pump Capacity	16.7 GPM (63.2 L/min.)
Travel Speed	7.3 MPH (11.7 km/hr.)
Operating Weight	5368 lb. (2435 kg)

Dimensions

Length (with bucket)	130.1 in. (3304 mm)
Width (with bucket)	68.0 in. (1727 mm)
Height	77.0 in. (1956 mm)
Height to Bucket Pin	114.5 in. (2909 mm)

Engine

Make/Model	Kubota/V2203-EB
Fuel/Cooling	Diesel/Liquid
Cylinders	4
SAE NET HP/Displacement	46/134 in. ³ (2.2 L)
Fuel Tank Capacity	14 gal. (53 L)

Operation

Steering and Drive	Forward, reverse, travel speed and steering controlled by two hand levers.
Hydraulics	Raise/lower lift arms and dump/rollback bucket controlled by two foot pedals or optional hand controls.
Transmission	Hydrostatic, four-wheel drive.

Standard Features

Adjustable Cushion Seat	Front & Rear Lights
Automatically Activated Glow Plugs	Lift Arm Support
Bobcat Interlock Control System (BICS™)	Meters/Gauges/Warning Lights
Bob-Tach™	Operator Cab
Deluxe Cab	Parking Brake
Dual Path Cooling System	Seat Bar
Engine/Hydraulic Shutdown	Seat Belt
Front Auxiliary Hydraulics	Spark Arrestor Muffler
	10-16.5 Bobcat Standard Duty Tires

Options/Accessories

Advanced Control System (ACS)	Hydraulic Bucket Positioning ²
Alarm Package (backup alarm and horn)	Keyless Start System Power Bob-Tach™
Bobcat Heavy Duty Tires	Rear Auxiliary Hydraulics
Heavy Duty Offset	Rear Stabilizer
Bobcat Poly-Fill Tires	Service Safety Training Kit
Bobcat Severe Duty Tires	Side Windows
Bobcat Super Float Tires	Skid-Steer Loader Operator Training Kit
Cab Enclosure	Sound Cab
Cab Heater	Special Applications Kit ³
Catalytic Purifier	Suspension Seat (vinyl or cloth cover)
Counterweight	Water Kit
Deluxe Instrument Panel	Weighlog
Engine Block Heater	
Flasher/Strobe Lights	

Powerful. Smooth. Fast.

Here's everything you want in a compact loader!

The Bobcat® 763 loader delivers plenty of power, lift capacity, lift height and travel speed.

The 763's 46-hp liquid-cooled engine produces top traction and breakout force for excavating and handling large loads. There's also a 15-gpm hydraulic pump for efficient attachment performance.

The long wheelbase provides a smooth, comfortable ride and helps give this rugged loader 1,500 pounds of rated operating capacity.

As with any Bobcat loader, you get a wide choice of quick-mounting Bobcat attachments for your 763. The operator can easily replace a bucket with a backhoe, pallet fork, landscape rake, sweeper, tiller, grapple and many more.

Greater Comfort

The cab is designed with the operator in mind!

- Excellent visibility to sides, front and rear corners of loader.
- Roomy comfort for operators of all sizes.
- Rear-pivot seat bar.
- State-of-the-art instrument panel.
- Fully-enclosed cab and heating system available.
- Fully-adjustable suspension seat available.

1500 LB.
Rated Operating Capacity
1600 lb. with optional counterweight kit

114.5 IN.
Lift Height

46 HP
Liquid-Cooled Diesel Engine

Optional Deluxe Instrument Package includes:

- Multi-language capability
- System diagnostic capability
- All gauges read in metric or English units
- Feature lockouts
- Keyless start security
- Digital and job clocks
- Help screens
- Attachment information

NOTE — Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat skid-steer loaders may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

¹ Operating capacity rated with standard digging bucket according to SAE standard J818. OPERATING CAPACITY TO EQUAL NO MORE THAN ONE-HALF THE TIPPING LOAD.

² Bucket positioning helps operator keep the same tilt of the load during lifting.


³ Includes Lexan front door, top and rear windows.

⁴ Special application kit (see #3) must be used.

A - 10-16.5 Tires - 66.0 (1676 mm) or 60.0 (1524 mm)
31.5 x 13-16.5 Tires - 66.0 (1676 mm)

B - 10-16.5 Tires - 54.5 (1384 mm) or 48.5 (1232 mm)
31.5 x 13-16.5 Tires - 52.3 (1328 mm)

C - 62 in. Bucket Width - 62.0 in. (1575 mm)
68 in. Bucket Width - 68.0 in. (1727 mm)

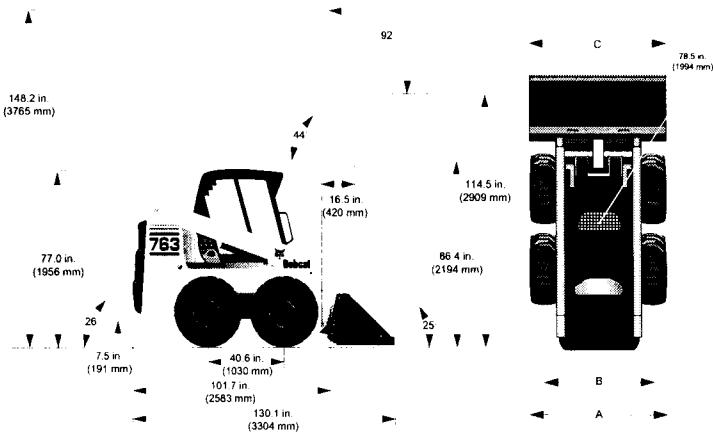

B-1723

Bobcat Company
P.O. Box 6000 • West Fargo, ND 58078
www.bobcat.com

Printed in U.S.A.

An **IR** Ingersoll-Rand business

KnB-30M-203-#640422-F

Bobcat Attachments for this model:

- Angle Broom*
- Auger
- Backhoe
- Box Blade
- Brushcat™ Rotary Cutter
- Buckets
- Chipper*
- Combination Bucket
- Concrete Mixer*
- Concrete Pump*
- Cutter Crusher*
- Digger
- Dozer Blade*
- Dumping Hopper
- Ejector Bucket
- Farm Grapple (for use with utility fork or bucket)
- Front Scarifier
- Grader*
- Hydraulic Breaker³
- Hydraulic Pallet Fork
- Industrial Grapple
- Landplane
- Landscape Rake
- Pallet Fork
- Planer*
- Rear Stabilizer
- Scarifier
- Scraper
- Snow Blade
- Snowblower*
- Sod Layer*
- Soil Conditioner*
- Spreader
- Sweeper
- Three-Point Hitch
- Tiller
- Tilt-Tatch
- Tracks
- Tree Spade*
- Trench Compactor
- Trencher
- Utility Fork
- Vibratory Roller
- Water Kit
- Whisker Push Broom

*Attachment Control Kit required.