


LIGHT INDUSTRIAL & UTILITY VENTILATORS

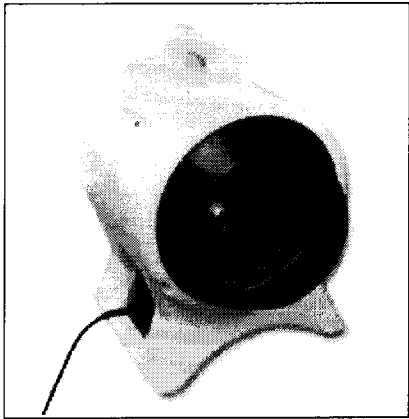

For a versatile portable ventilator with just the right amount of power, the UT-VAF-1500 (blower/extractor) or UT-VAF-1500B (blower only) is ideally suited for light industrial or utility applications.

A perfect workhorse for small confined spaces, such as manholes and sewers, these compact blowers deliver maximum airflow for a safe, comfortable and controlled work environment. Your construction, utility or telephone crews can depend on the UT-VAF-1500/1500B to deliver a continuous flow of fresh air to the UT-VAF-1500 to blow and extract toxic or noxious gases.

- CFM rating of 848 (UT-VAF-1500) and 1,262 (UT-VAF-1500B)
- Lightweight, only 18 pounds (8.2 Kg)
- Stackable to save storage or work space area
- Available in bright yellow for high visibility
- Capability to connect up to 50 feet (15.24 m) of straight duct
- Ideal for manhole applications

MOTOR SPECIFICATIONS:



MODEL	UT-VAF-1500	UT-VAF-1500B	A B
Voltage	115V AC~	230V AC~	115V AC~
Frequency	60 Hz	50 Hz	60 Hz
Phase	Single	Single	Single
Electric Motor	1/4 Hp	1/4 Hp	1/4 Hp
Current(amps)	2.3	1.3	2.3
R.P.M.	3200	2660	3200
Max. S.P.	1.5"	1.5"	1.5"