

DYNAPAC



Part of the Atlas Copco Group

CC900G

Double drum vibratory rollers



Technical data

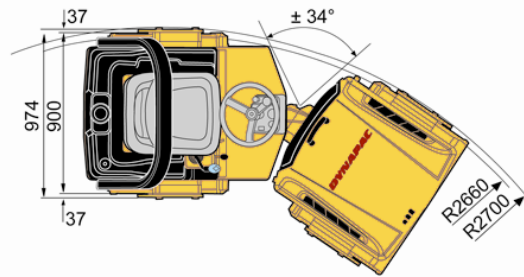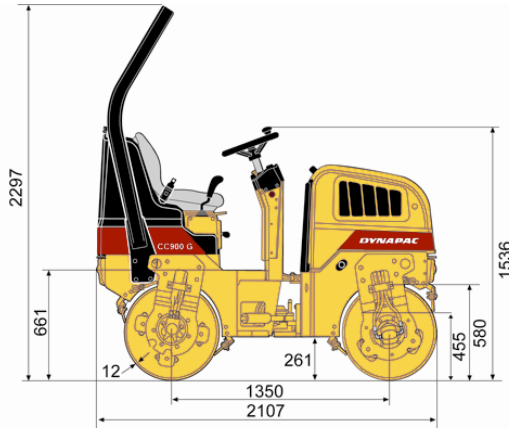

Masses	CC900G
Max. operating mass	1,510 kg
Operating mass (incl. ROPS)	1,335 kg
Front module mass	595 kg
Rear module mass	740 kg
Traction	
Speed range (km/ h)	0-8
Vertical oscillation	±13°
Theor. gradeability	35 %
Compaction	
Static linear load, front	6.60 kg/ cm
Static linear load, rear	8.20 kg/ cm
Nominal amplitude	0.40 mm
Vibration frequency	70 Hz
Centrifugal force	17 kN
Water tank (l)	190
Engine	
Manufacturer	Honda
Model	GX620k1QYD
Type	4- stroke gasoline
Rated power	18 hp
Rated power	13.40 kW
Rated power @	3,000 rpm
Rated power (rating standard)	SAE J1995
Fuel tank capacity	23 l
Hydraulic system	
Driving	Axial piston pump with variable displacement. 2 radial piston motors with constant displacement.
Vibration	Gear pump/ motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe brake in both drums.

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.