




Search

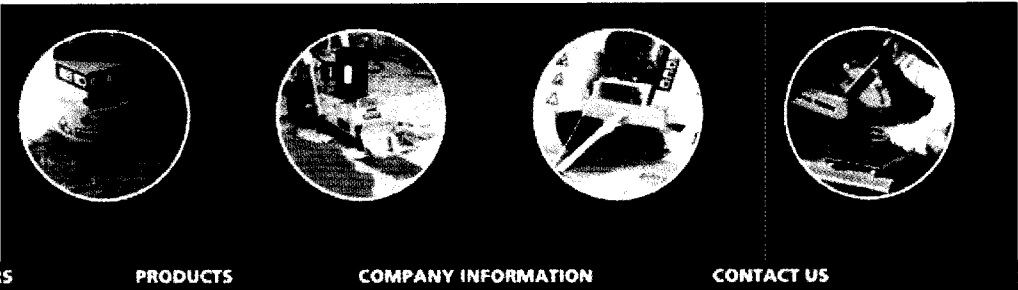

HOME

CUSTOMERS

PRODUCTS

COMPANY INFORMATION

CONTACT US

20" Self-Propelled Saw

Walk-Behind

Self-Propelled

Core Drills

Crack Chaser

Water Trailers


20" Self-Propelled Saw | 24" Self-Propelled Saw | 26" Self-Propelled Saw | 36" Self-Propelled Saw

Features

- Stressproof, precision-machined, 1 3/4" steel arbor shaft
- Includes electric start, 12-volt battery and heavy-duty 15-amp charging system
- Swing-away, rear 3-gallon fuel tank
- Screw-type depth control w/lock guarantees accurate cutting

Ideal For:

- Highway, road and bridge deck repair
- Utility installation and or traffic loop installation



REQUEST QUOTE

Model	Part #	Power	Horse Power	Phase	Amps	* RPM's	Belts	Length	Width	Height	Weight
* SS-20-20H	32600	Gasoline	**20 HP	NA	NA	2760	Cgd. "V" Belts	46"	25"	39"	458 lbs.
SS-20-13H	32800	Gasoline	**13 HP (16" Max. Bade)	NA	NA	3600	Cgd. "V" Belts	46"	25"	39"	438 lbs.
SS-20-7.5B	33200	Electric	7.5 HP 230/460 V	Three	17.4/8.7	2835	Cgd. "V" Belts	46"	25"	39"	465 lbs.
SS-20-10B	33100	Electric	10 HP 230/460 V	Three	23/11.5	2835	Cgd. "V" Belts	46"	25"	39"	478 lbs.
SS-20-25P	34600	Propane	25 HP Propane Kohler	NA	NA	2760	Cgd. "V" Belts	46"	25"	39"	498 lbs.

* RPM's are based on the saw's blade speed.

** As rated by the engine manufacturer. The power rating of the engine indicated on this site is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at 3600 rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.