






- Home
- About
- Equipment
- Products
- Services
- Why Buy?
- Where to Buy?
- Resources
- Contacts
- Distributors Only

B70 Straw Blower




Skid Model



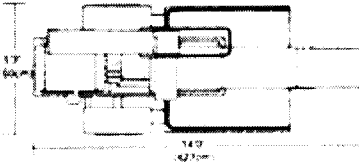

Trailer Model

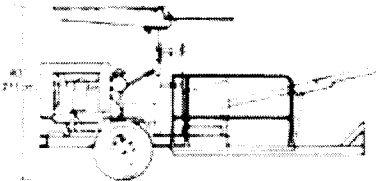


Equipment

- ▶ B-260
- ▶ B-70
- ▶ B-40
- ▶ Krimper

B-70 Straw Blowers Specifications



Power	Diesel Kubota V 1505, 33.5 hp (25kw), 4 cylinder water cooled diesel engine with over-center clutch.
Engine Safety System	Low oil pressure, high water temperature shutoff
Fuel Tank Capacity	13.5 gal. (51 liters)
Capacity	Up to 7 tons of hay or straw per hour
Range	60 feet (18m) in still air
Feed	Manual
Beater Chamber	3.5 cubic foot (99 liters) with removable beater chains.
Discharge Spout	Block bearing mounted. 360 degree horizontal rotation and 70 degree vertical travel.
Blower	Dynamically balanced, 21" (53 cm) diameter fan with 6 blades developing a discharge velocity greater than 150 mph (240 km/h).
Feed Tray	Folding tray, adjustable height to meet bed of supply vehicle.

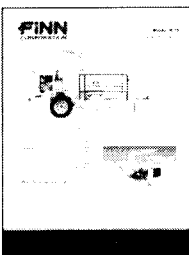

SPEC SHEETS

Drive	Blower fan in-line coupled to over-center clutch with flexible coupling and two pillow block bearings.
Weight	B70S- 1590 lbs. (721 kg) B70T- 2250 lbs. (1020 kg)
Trailer Option	Independent suspension rubber torsion axle, 75R/15 load range B, highway tread radial tires, fenders, D.O.T. highway lights, dual skid proof operator platforms, parking jack, 2" (5 cm) ball or heavy duty eye hitch.
Brakes	Electric with breakaway switch.
FINN Corporation has a policy of continuous product improvement, and reserves the right to change design and specifications without notice.	



CWS

FIND A
US/CANADA
DEALER

FIND AN
INTERNATIONAL
DEALER

FIND A
RENTAL
LOCATION

800-543-7166

Smarter Ways to Work Since 1935 © 2006 FINN CORP ■ ■ ■ •