

heat wagon



342 N. Co. Rd. 400 East
Valparaiso, IN 46383


219-464-8818 • 888-432-8924 • Fax 800-255-7985

Model 2730C

SPECIFICATIONS

Input	2,000,000 BTU	
Fuel	Vapor Propane, Natural Gas Liquid Propane (see model chart)	
Inlet Pressure	Max PSI 250 lbs.	Min PSI 10 lbs.
Gas Consumption.....	21.9 GPH 2000 CFH	LP NG
Electrical Requirements	240V 1Ø 30 Amp 208-240V 3Ø 30 Amp 480V 3Ø 10 Amp	
Fan	12,500 CFM 3.0 HP 2" Static Pressure	
Thermostat.....	High - Low	
Setting Range	110°F - 30°F	
Temp Rise	220°F	
Dimension	72"L x 32"W x 46"H	
Approximate Weight	440 lbs.	

**For lower pressures consult authorized Heat Wagon distributor or the factory.*

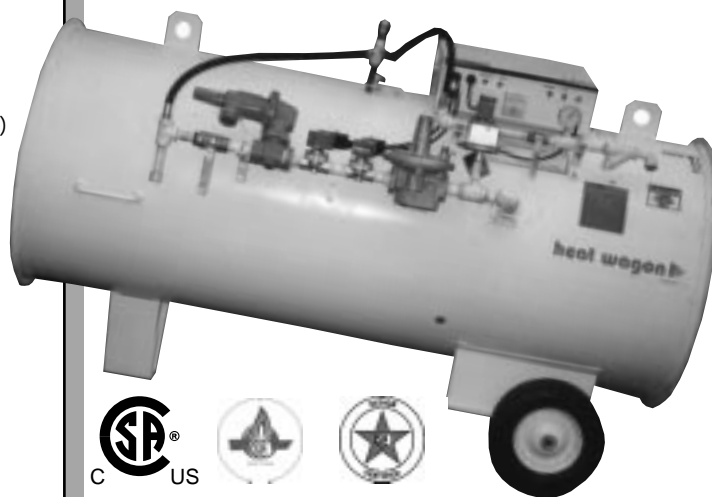

**Propane or Natural Gas
Portable Space Heater**

Model Chart

Model	Fuel	Power
2730C1	Natural Gas	1Ø 240V
2730C2	Natural Gas	3Ø 240V
2730C3	Natural Gas	3Ø 480V
2730C4	Propane	1Ø 240V
2730C5	Propane	3Ø 240V
2730C6	Propane	3Ø 480V
2730C7	Liquid Propane	1Ø 240V
2730C8	Liquid Propane	3Ø 240V
2730C9	Liquid Propane	3Ø 480V

Features

- Air flow switch
- Burner heat shield
- Ductable
- Flame safeguard control
- Fused disconnect switch
- Hi limit switch
- Manifold pressure gauge
- Motor overload - manual reset
- Panel mounted voltage meter
- Remote thermostat
- Weather sealed control box

Benefits

- Safe fuel shutdown if combustion air is interrupted
- Low housing temperature
- May be ducted up to 200 feet
- Safe monitoring of combustion, two trial electronic ignition with 20 second pre-purge time delay and 7 second shutdown
- Direct wire with easy, safe 100% power shut off
- Protects heater by shutting down if unit is being overfired
- Helps in diagnosing specific gas flow problems
- Protects heater by shutting down if voltage is too low
- Easy monitoring of control voltage to ensure trouble-free operation
- Automatically cycles the heater high - low to maintain room temperature
- Protected electrical components

www.heatwagon.com