




COMMERCIAL  
PRODUCTS™

# 30 Ton

## ***BHH3003 Horizontal Log Splitter***

- 30 ton splitting force
- 15 second cycle time
- 11 HP (342cc) Horizontal Shaft Engine

This commercial grade log splitter is engineered and built to handle the toughest jobs. The special horizontal design allows for high production operation with the use of a conveyor or bucket. Iron & Oak's rigid quality control and component testing help ensure years of productive, reliable service, and an attractive powder coat finish provides the finest protection available. Since 1982, the name Iron & Oak has stood for quality and reliability when it comes to log splitters and wood processing products.

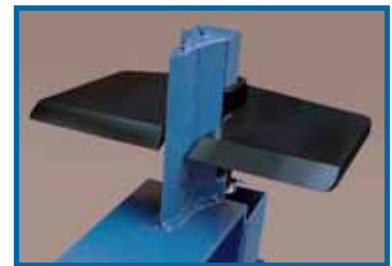

*Four-Way Wedge (optional)*



**Made in the U.S.A.**

# BHH3003 Horizontal Log Splitter



**Iron & Oak – the finest professional quality log splitter on the market today!**

- Rugged, heavy-duty construction for years of exceptional service
- Horizontal design for convenient use with conveyor or bucket
- Rigid quality control during manufacturing ensures greater reliability
- Factory testing of all major components and hydraulic tank
- Powder coated finish for the best appearance and weather protection
- Year-round manufacturing, parts, and support

## MECHANICAL SPECIFICATIONS

---

Beam	Heavy-duty 6 inch H-Beam
Wedge	9 inch high carbon steel, (optional 4-way wedge)
Force/Tonnage	30 ton
Cylinder Stroke	24 inches
Log Opening	24.5 inch maximum
Cycle Time	15 seconds (approx.)
Operating Positions	Horizontal
Wheels & Tires	6.50 x 4.80 x 12 in. bolt-on wheels
Safety Chains	Standard
Hitch Coupler	2 inch locking ball (standard)
Engine	11 HP (342cc) B&S IC horizontal shaft engine Optional: 11 HP (342cc) B&S standard, 9 HP (270cc) Honda, 9 HP (265cc) Robin

## HYDRAULIC SPECIFICATIONS

---

Cylinder Size	5" x 24" Clevis type cylinder, 2" rod
Hydraulic Tank	7.5 gallon capacity
Hydraulic System	9.5 gallon capacity
Hydraulic Oil Filter	Spin-on type, 60 micron filter
Safety Release Control Valve	Detent, auto return
Gear Pump	2-stage, 16 GPM
Hydraulic Oil	
Above 30° F	Use AW-32, 10W (non foaming) or ATF Dextron III
Below 30° F	Use only ATF Dextron III
Shipping Weight	650 lbs.

Cover photos may deviate slightly from actual units. Materials and specifications subject to change without notice.



**COMMERCIAL  
PRODUCTS™**

**Iron & Oak Commercial Products**

410 W. Broadway Ave.

P.O. Box 577

Streator, Illinois 61364-0577

Phone: 815-672-8596 • Fax: 815-672-9073

E-mail: [sales@logsplitters-ironoak.com](mailto:sales@logsplitters-ironoak.com)

**Web Site: [www.logsplitters-ironoak.com](http://www.logsplitters-ironoak.com)**