


Receptacle Configuration

QTY	NEMA#	DESCRIPTION
2	5-20R	20 Amp 120 Volt Straight Blade GFI
1	L-530	30 Amp 120 Volt TwistLock (3 Blade)
1	L-1420	20 Amp 120/240 Volt TwistLock (4 Blade)

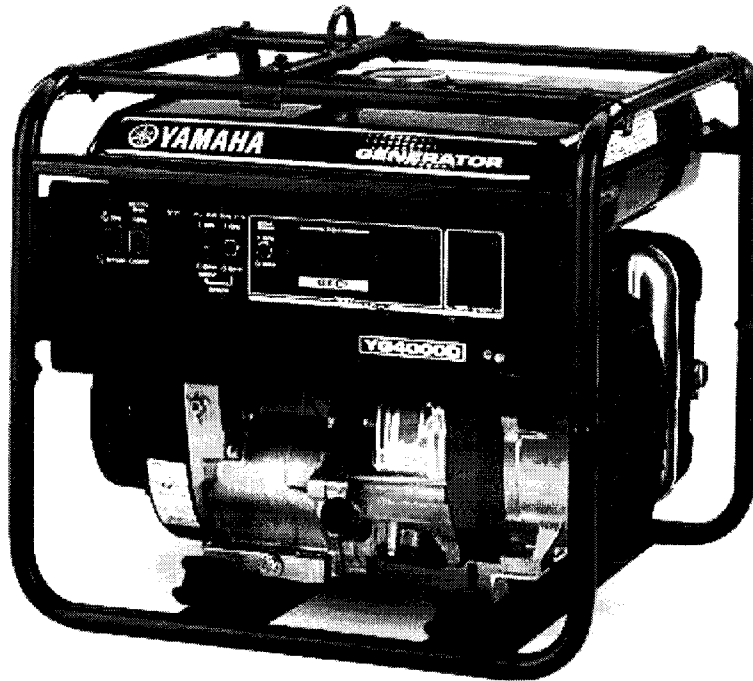

MODEL	YG-4000D
Model / Model Code	YG-4000D
SIZE AND WEIGHT	
Physical Dimensions (L x W x H)	22.8" x 20.1" x 20.1"
Dry Weight	127 lbs
ENGINE:	
Engine Type	4-Stroke, OHV, Air-Cooled, Single Cylinder
Number Cylinders / Displacement / HP	1 / 251cc / 8.5hp
Oil Type	Yamalube 4, 10W30
FUEL TANK:	
Capacity	4.8 gal
Fuel Type	Unleaded Regular
GENERATOR:	
Type	Brushless / AVR AC
Phase	Single
Maximum AC Output	4000 Watts
Rated AC Output	3500 Watts

Rated AC Current	29.0 Amps @ 120V / 15 Amps @ 240V
Frequency	60 Hz
Coil Resistance (Ω +10%)	
Run Time ~	8.5 hrs at half rated load
Noise Level	69.0 dB
Ignition System	T.C.I (Transistor Controlled Ignition)